



SUBMITTAL - 6,000BTU WALL-MOUNT

Job Name:		Submitted For:	Approval	
Location:		Reference	Construction	
Engineer:		Date:		
Submitted By:		Unit Tag:		
Submitted To:		Drawing No.:		
WARRANTY				
Standard 10 Years Parts & Compress	sor			
When combined with Moovair outdoor unit. Terms & Con	nditions Apply.			1/6
MODELS				
Indoor	DMA06HIW25230E8			
CAPACITY				Images for reference only
Cooling (Nominal Btu/h)	6000	CERTIFIED ¹		
Heating (Nominal Btu/h)	6000			
LINE SET & REFRIGERANT		AHP! CERTIFI		IS energy
Liquid (in.)	1/4"	www.ahridirecto	LISTED	ENERGY STAR
Gas (in.)	3/8"	1. When combined with certified N	loovair outdoor unit.	
Connection Type	Flared	ELECTRICAL		
Refrigerant Type	R410A	Power (From ODU)	(V/Ph/Hz)	208-230/1/60
Drain Pipe O.D. (mm)	19	Voltage Range	(V)	187-253
DIMENSIONS & WEIGHTS		Power Input (W)		

33.66x9.09x11.69

10.3

13.1

36.22x12.20x14.57

22.71

28.88

INCLUDED ACCESSORIES

Indoor

RG10L2(D2HS)/BGEFU1 - Remote Controller

Gross Weight lbs | kg

Net (WxDxH; in.)

Gross (WxDxH; in.)

Net Weight lbs | kg


2. Performance may vary depending on system design. 3. Connection of these accessories may require secondary items not listed; refer to full product literature. | Master Group is not responsible for the accuracy and validity of any changes made to this document without the written authorization of Master Group. Specifications subject to change without notice.


1. When combined with Certified Moovair Outdoor unit.						
ELECTRICA	L					
Power (From ODU)		(V/Ph/Hz)	(V/Ph/Hz) 20			
Voltage Range		(V)		187-253		
Power Inpu						
Current (A)						
FAN ²						
Indoor	Turbo	High	Med.	Low		
CFM	364	317	217	167		
dB(A)		36	32	23		
Indoor ESP	Range inWo	G				
Indoor Moi	0.15					
OPTIONAL ACCESSORIES ³						
173109000						
KJR-120L(R						
KJR-120N(X						
KJR-120N1						
24VINTERF						






INDOOR UNIT DRAWING



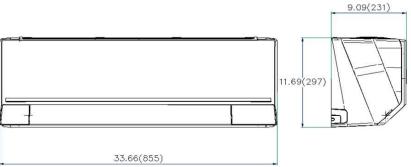



Tag inches					
inches					
mm					
Tag inches					
inches					
mm					
NOTES					