

MAADDANITV



Approval

Construction

SUBMITTAL - 12,000BTU DUCTED

Submitted For:

Reference

Date: Unit Tag: **Drawing No.:**

| Job Name: | |
|---------------|--|
| Location: | |
| Engineer: | |
| Submitted By: | |
| Submitted To: | |
| | |

| WARRANTY | | | | | | |
|--|-----------------------|---------|-------------------|--|--|--|
| Standard 10 Years Parts & Compressor | | | | | | |
| When combined with Moovair outdoor unit. Terms & Conditions Apply. | | | | | | |
| MODELS | | | | | | |
| Indoor | DUA12HIDU230X5 | | | | | |
| CAPACITY | | | | | | |
| Cooling (No | 12000 | | | | | |
| Heating (N | 12000 | | | | | |
| LINE SET & REFRIGERANT | | | | | | |
| Liquid (in.) | 1/4" | | | | | |
| Gas (in.) | 1/2" | | | | | |
| Connectior | Flared | | | | | |
| Refrigerant | R410A | | | | | |
| Drain Pipe | 25 | | | | | |
| DIMENSIONS & WEIGHTS | | | | | | |
| Indoor | Net (WxDxH; in.) | 27.56x | 27.56x19.92x7.87 | | | |
| | Gross (WxDxH; in.) | 33.86x2 | 33.86x21.26x11.22 | | | |
| | Net Weight Ibs kg | 39.24 | 17.8 | | | |
| | Gross Weight Ibs kg | 48.5 | 22 | | | |
| INCLUDED ACCESSORIES | | | | | | |
| KJR-120L(R1)/EFU1 - Wired Controller | | | | | | |


2. Performance may vary depending on system design. 3. Connection of these accessories may require secondary items not listed; refer to full product literature. | Master Group is not responsible for the accuracy and validity of any changes made to this document without the written authorization of Master Group. Specifications subject to change without notice.



| | | | Images f | or reference only. | | | |
|---|-------------------------------|------|------------|--------------------|--|--|--|
| CERTIFIED ¹ | | | | | | | |
| | | | | ergy | | | |
| 1. When combined with certified Moovair outdoor unit. | | | | | | | |
| ELECTRICA | L | | | | | | |
| Power (Fro | Power (From ODU) (V/Ph/Hz) 20 | | 8-230/1/60 | | | | |
| Voltage Ra | Voltage Range (V) | | 187-253 | | | | |
| Power Inpu | | | | | | | |
| Current (A) | | | | | | | |
| FAN ² | | | | | | | |
| Indoor | Turbo | High | Med. | Low | | | |
| CFM | | 352 | 282 | 176 | | | |
| dB(A) | | 40 | 31.5 | 26.5 | | | |
| Indoor ESP | 0-0.32 | | | | | | |
| Indoor Moi | 1.69 | | | | | | |
| OPTIONAL ACCESSORIES ³ | | | | | | | |
| WF-60A1-F | | | | | | | |
| KJR-120N(X | | | | | | | |
| KJR-120N(X | | | | | | | |
| 24VINTERF | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |



INDOOR UNIT DRAWING

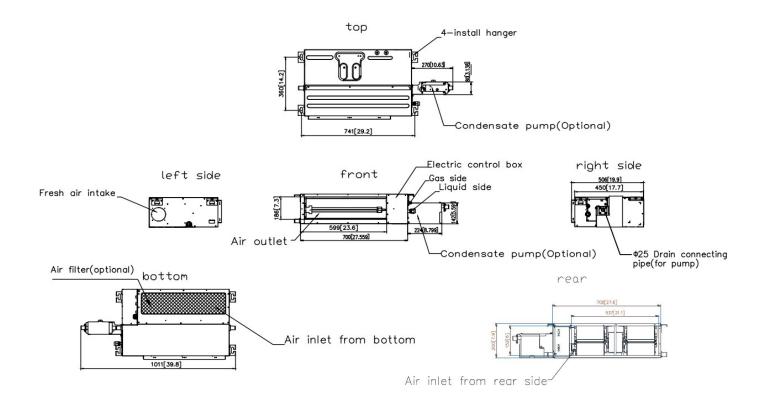

NOTES

Drawing dimensions are nominal. Specifications subject to change without notice.