

WARRANTY



SUBMITTAL - 18,000BTU CEILING CASSETTE

Job Name:	
Location:	
Engineer:	
Submitted By:	
Submitted To:	

Submitted For:

Reference

Approval Construction

Date: Unit Tag:

Drawing No.:



Images for reference only.



1. When combined with certified Moovair outdoor unit.


ELECTRICA	L						
Power (From ODU)		(V/Ph/Hz)	208	8-230/1/60			
Voltage Range		(V)		187-253			
Power Inpu							
Current (A)							
FAN ²							
Indoor	Turbo	High	Med.	Low			
CFM		562	485	438			
dB(A)		43.5	38.5	35.5			
Indoor ESP							
Indoor Moi	2.22						
OPTIONAL	OPTIONAL ACCESSORIES ³						
CASSETTEG							
WF-60A1-F							
KJR-120L(R							
KJR-120N(X							
KJR-120N(X							
24VINTERF							

Standard 10 Years Parts & Compressor					
When combined with Moovair outdoor unit. Terms & Conditions Apply.					
MODELS					
Indoor	DUA18HICU230X5				
CAPACITY					
Cooling (No	18000				
Heating (N	18000				
LINE SET &	REFRIGERANT				
Liquid (in.)	1/4"				
Gas (in.)	1/2"				
Connectior	Flared				
Refrigerant Type			R410A		
Drain Pipe	Drain Pipe O.D. (mm)				
DIMENSIO	NS & WEIGHTS				
Indoor	Net (WxDxH; in.)	22.44x2	22.44x10.24		
	Gross (WxDxH; in.)	26.06x2	6.06x12.48		
	Net Weight Ibs kg	35.71	16.2		
	Gross Weight Ibs kg	46.96	21.3		
INCLUDED	ACCESSORIES				
RG10B(D1)/BGEFU1 - Remote Controller					

2. Performance may vary depending on system design. 3. Connection of these accessories may require secondary items not listed; refer to full product literature. | Master Group is not responsible for the accuracy and validity of any changes made to this document without the written authorization of Master Group. Specifications subject to change without notice.



INDOOR UNIT DRAWING

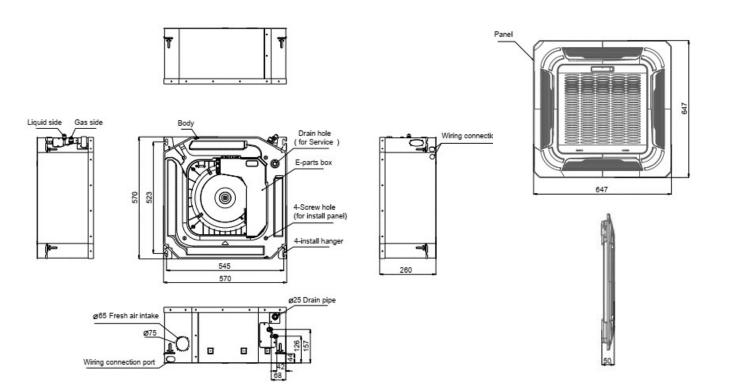

Тад					
Tag inches					
mm Tag inches					
Tag					
inches					
mm					
NOTES					

Drawing dimensions are nominal. Specifications subject to change without notice.