



SUBMITTAL - 24,000BTU WALL-MOUNT

| Job Name: | | , -, - | Submitted For: | Approval | | |
|---|------------------------|---|------------------------|--------------|----------------------------|--|
| Location: | | | Reference | Construction | | |
| Engineer: | | | Date: | | | |
| Submitted By: | | | Unit Tag: | | | |
| Submitted To: | | | Drawing No.: | | | |
| | | | | | | |
| WARRANTY | | | | | | |
| Standard 10 Years Parts & Com | pressor | | | \ | | |
| When combined with Moovair outdoor unit. Tern | ns & Conditions Apply. | | | \ | 1/1 6 | |
| MODELS | | | | | | |
| Indoor | DMA24HI | W25230E8 | | | | |
| CAPACITY | | | | | Images for reference only. | |
| Cooling (Nominal Btu/h) | | 24000 | CERTIFIED ¹ | | | |
| Heating (Nominal Btu/h) | | 24000 | | | | |
| LINE SET & REFRIGERANT | | | CERTIFI CERTIFI | | US energy | |
| Liquid (in.) | | 3/8" | www.ahridirecto | LISTED | ENERGY STAR | |
| Gas (in.) 5/8" | | 1. When combined with certified Moovair outdoor unit. | | | | |
| Connection Type | | Flared | ELECTRICAL | | | |
| Refrigerant Type | | R410A | Power (From ODU) | (V/Ph/Hz) | 208-230/1/60 | |
| Drain Pipe O.D. (mm) | | 19 | Voltage Range | (V) | 187-253 | |
| DIMENSIONS & WEIGHTS | | | Power Input (W) | | | |
| Indoor Net (WyDyH: in) | 47 09x1 | 0 98x14 57 | Current (A) | | | |

50.39x14.17x17.91

19.8

24.9

43.65

54.89

INCLUDED ACCESSORIES

RG10L2(D2HS)/BGEFU1 - Remote Controller

Gross Weight lbs | kg

Gross (WxDxH; in.)

Net Weight lbs | kg


2. Performance may vary depending on system design. 3. Connection of these accessories may require secondary items not listed; refer to full product literature. | Master Group is not responsible for the accuracy and validity of any changes made to this document without the written authorization of Master Group. Specifications subject to change without notice.

| When combined with certified Moovair outdoor unit. | | | | | | | |
|--|-----------------------|--------------|------|------------|--|--|--|
| ELECTRICAL | | | | | | | |
| Power (From ODU) | | (V/Ph/Hz) 20 | | 8-230/1/60 | | | |
| Voltage Range | | (V) | | 187-253 | | | |
| Power Inpu | | | | | | | |
| Current (A) | | | | | | | |
| FAN ² | | | | | | | |
| Indoor | Turbo | High | Med. | Low | | | |
| CFM | 718 | 611 | 414 | 318 | | | |
| dB(A) | | 46 | 39 | 34 | | | |
| Indoor ESP | Indoor ESP Range inWG | | | | | | |
| Indoor Moi | 2.6 | | | | | | |
| OPTIONAL ACCESSORIES ³ | | | | | | | |
| 173109000 | | | | | | | |
| KJR-120L(R | | | | | | | |
| KJR-120N(X | | | | | | | |
| KJR-120N1 | | | | | | | |
| 24VINTERF | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |





INDOOR UNIT DRAWING

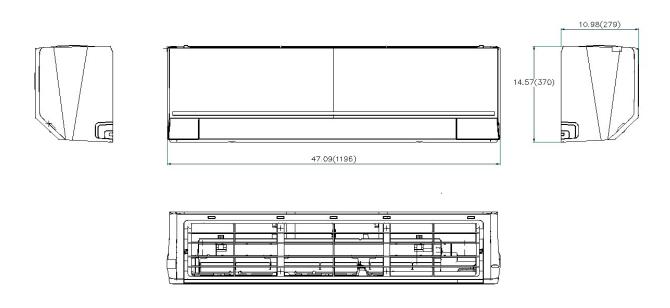

| Tag | | | | | | | | |
|---------------|--|--|--|--|--|--|--|--|
| Tag inches | | | | | | | | |
| mm | | | | | | | | |
| Tag inches | | | | | | | | |
| inches | | | | | | | | |
| mm | | | | | | | | |
| NOTES | | | | | | | | |